

# Experimental Study: The Influence of Shaft Slope on Rotation of the Three Bladed Archimedes Screw Turbine

*By* Tinneke Saroinsong

## Experimental Study: The Influence of Shaft Slope on Rotation of the Three-Bladed Archimedes Screw Turbine

Tineke Saroinsong<sup>1</sup>, Alfred Nouffie Mekel<sup>1</sup>, Adelbert Thomas<sup>1</sup>, Rudy Soenoko<sup>2</sup>

<sup>1</sup>The Manado State Polytechnic, Mechanical Engineering Department, 95254, Manado, Indonesia.

<sup>2</sup>Brawijaya University, Mechanical Engineering Department Faculty, 65154, Malang, Indonesia.

### Abstract

A study of the Archimedes screw turbine which is applied to microhydro power plants is being developed specifically regarding fluid flow characteristics associated with the performance of the three-bladed Archimedes screw turbine. Flow discharge is an important factor in the study of the performance of the three-bladed Archimedes screw turbine. The purpose of this study is to determine the influence of the shaft slope on the rotation of the turbine shaft. The independent variable determined is the flow velocity of the channel of 1.88 m/s; 1.77 m/s; 1.66 m/s and 1.54 m/s, then the slope of the turbine shaft of 10°, 20°, and 30°. The method to be used is experimental method by making prototype or model of the three-bladed Archimedes screw turbine was made by using flexyglass material with laboratory scale. The geometric shape of three blades, 30° threaded angle, a radius ratio of 0.54 with a pitch of 2.4R<sub>o</sub>. The result of this research is the slope of 30° screw turbine shaft, resulting in the highest turbine rotation of 416 rpm which occurs at 8 cm flow depth. While at a flow depth of 10 cm to produce turbine rotation of 402 rpm. This happens because the flow is more wasted when the flow enters the turbine.

**Keywords:** Experimental, screw turbine, slope shaft, rotation

### INTRODUCTION

The use of electrical energy is growing as the population grows and the various facilities that depend on electrical energy. However, the availability of electrical energy from State Electrical Company (PLN) is not sufficient to meet the needs of the people of Indonesia. Therefore, it is necessary to conduct research on the utilization of renewable energy sources which are widely owned by our country Indonesia one of which is the flow of rivers and irrigation channels. Potential river flow/irrigation can be made microhydro power plant (PLTMH). The types of well-known water turbines applied to microhydro power plants are the crossflow turbines, the Kaplan turbines, the propeller turbines, the turgo turbines, the Francis turbines, and the Pelton turbines. The screw turbines are a new type of water turbine under study this decade, adopted from the Archimedean screw theory. The advantages of screw turbines, among others, can operate at low head ( $H < 10$  m), do not require fast pipe, easy installation, easy maintenance and not damaging river ecology or fish-friendly (David Kilama Okot, 2013). Threaded turbines are categorized as turbine reaction types that can be used in low head (Elbatran A.H. dkk 2014). The kinetic energy and

potential energy of the water stream are transformed into mechanical energy on the screw blades resulting in a rotation of the turbine shaft which can be converted into electrical energy in the generator through transmission. The density of the water on the blade causes the thread to rotate. Assuming there is no loss all potential energy in the flow can produce a maximum efficiency of 100%, (Müller Gerald 2009).

Some researchers have developed Archimedean screw turbine research, among others, on the optimization of numerical design of screw geometry by (Rorres 2000) states that the optimum range ratio depends on the number of blades and the radius ratio ( $R_1/R_0$ ) is equal to 0.54. Then (Gerber Müller 2009) simplified the Archimedes screw theory based on geometric parameters and the ideal energy conversion process for one helical spin. The results of his research states that the efficiency of threaded turbines is influenced by geometry and flow loss. Furthermore (Nuembergk Dirk M., Rorres 2013) introduces an analytical model of screw turbine inlet inflows taking into account the possibility of leakage flow in the gap between the thread and the outer cylinder (casing) as well as the excess water at the center of the pipe. MATLAB simulation of screw turbine for hydropower in low head is done by (Ali Raza et al 2013). Modeling and torque of (Müller Gerald 2009), (Nuembergk Dirk M., Rorres 2013), and (Ali Raza et al. 2013) they compare with experiments from Brada (1996a) and Brada (1996b). Further research was conducted by Havendry Adly and Hendro Lius (2010) regarding the determination of optimum thread angle in threaded turbine with variation of screw angle 23°, 26° and 29°. In the report explains that the screw angle 29° produces better power and efficiency compared to thread angles of 23° and 26°. Then Hizhar Yul (2011) investigated the effect of pitch and slope differences on the performance of the two-bladed screw turbine model in low head flow. The result of the research is the range of 2R<sub>o</sub> produce rotation speed higher than 1.6R<sub>o</sub> and 1.2R<sub>o</sub>. Saroinsong Tineke (2016) reported in a study on the effect of Froude Number on the efficiency of screw turbine where the greater the Froude Number the lower the efficiency of screw turbine. The largest Froude Number occurs on a 45° axis inclination.

The study of screw turbine in experimental method still need to do to get real information for screw turbine therefore it can be applied optimally. The focus of this research is how the influence of the turbine slope on the turbine rotation of the three-bladed Archimedes screw turbine. This research is important because the slope of the shaft is a factor of head in the hydraulic power calculation. Hydraulic power is the

source of power generation in the Archimedes turbine turbine.  $P_{hyd} = \rho \cdot g \cdot Q \cdot H$ . The slope of the turbine shaft ( $\alpha$ ) is the head factor ( $H$ ) of the hydraulic power calculation, where  $L$  is the length of the turbine.  $H = L \cdot \sin \alpha$

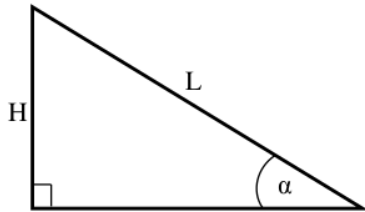


Figure 1. Sketches laying turbine shaft

## 2. Research Methods

This experimental research was made by simulated model of the three-bladed screw turbine as shown in Figure 2. The working fluid is water. Threaded material is made of flexyglass with pipe size for 60 mm shaft, 25 mm blade height, pitch of  $2.4R_o$ , radius ratio ( $R_i/R_o$ ) is 0.54 and  $30^\circ$  threaded angle. How to get data is first setting installation according to specified parameter and calibration measuring instrument. Test running water flow from the container is flowed through the pump to the container tank by setting the discharge through the valve. Furthermore, the water entering

into the tranquilizer through the pipe connection is set up until steady flow conditions. Then the flow velocity of the tank of sedation towards the rectangular channel is regulated through the high water gate by measuring the water level in the tank. The turbine inlet depth is set at the sluice gate and measured at the end of the turbine inlet. The flow of water then enters the turbine causing the screw blades to rotate and the flow back flowing to the container tank through the pump continuously. After that start the data retrieval process by adjusting the position of the shaft slope  $\alpha$ . Measurement data taken is turbine rotation ( $n$ ) using tachometer. Measurement data were taken for each variation of 0.1 m inlet depth; 0.08 m; 0.06 m; and 0.04 m with flow rate variation of 1.88 m/s; 1.77 m/s; 1.66 m/s and 1.54 m/s on each variation of  $\alpha$  axis of  $10^\circ$ ,  $20^\circ$ ,  $30^\circ$ . The measurement data is repeated five times on each variable.

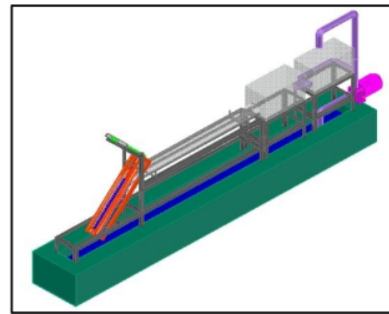


Figure 2. Three-bladed Archimedes screw turbine installation

Description of Archimedes screw turbine installation:

- |                                  |                                       |
|----------------------------------|---------------------------------------|
| 1. Threaded turbine model        | 8. Water reservoir tank               |
| 2. Pulley and belt               | 9. Pipe                               |
| 3. Spring balance                | 10. Control valve                     |
| 4. Measurers of inlet flow depth | 11. Pumps                             |
| 5. Open channel                  | 12. Measurers depth depth in the tank |
| 6. Water gate                    | 13. Container                         |
| 7. Water tank                    | 14. Position tachometer               |


Parameter model of the screw turbine:

Parameter	value	description
$R_o$	0.055 m	outside radius
$R_i$	0.030 m	inner radius
$S$	0.132 m	pitch
$N$	3	number of blades
$m$	21	the number of threaded windings
$\beta$	$30^\circ$	threaded angle
$\lambda_v$	0.059	volume ratio of each thread loop (Rorres 2000)
$\alpha$	$10^\circ, 20^\circ, 30^\circ$	Turbine shaft slope


**RESULTS AND DISCUSSION**

The results of the experimental data retrieval can be presented through graph between the Shaft Turbine and Turbine Rotation at the Flow Rate of 1.88 as shown in Figure 3. The


graph shows that the highest turbine rotation of 416 rpm occurs at a flow depth of 0.08 m with a 30 ° axis inclination. at a flow depth of 0.1 m yields a turbine rotation of 402 rpm. This occurs because the flow is more wasted when the flow enters the turbine.

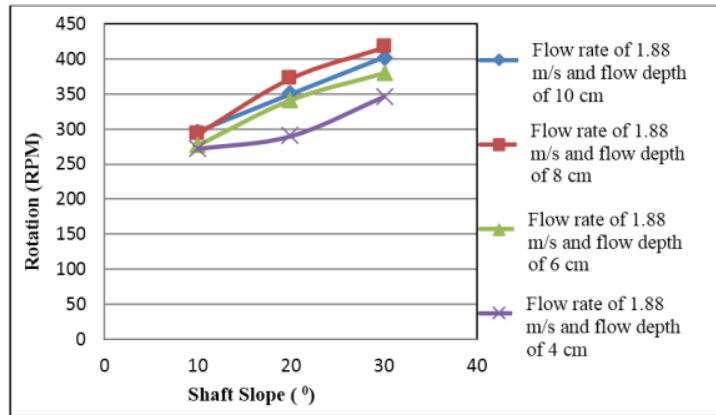


**Figure 3.** Graph between the Shaft Tilt and Rotation at a Flow Rate of 1.88 m/s

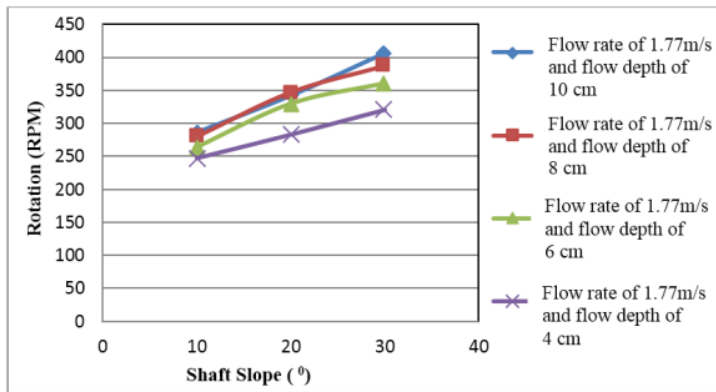

**Figure 4.** Graph between the Shaft Tilt and Rotation at a Flow Rate of 1.77 m/s

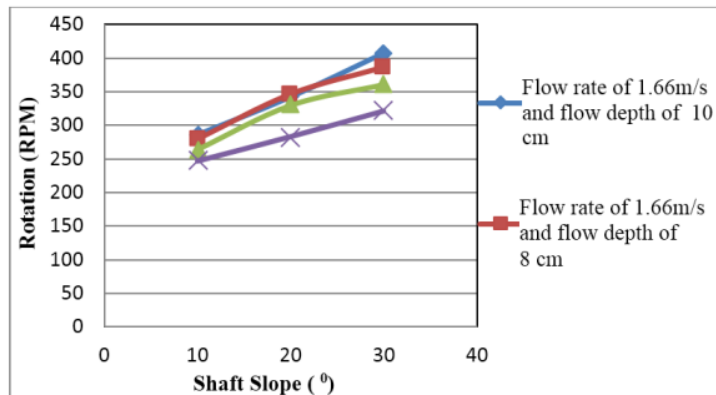

**Figure 5.** Graph between the Shaft Tilt and Rotation at a Flow Rate of 1.66 m/s

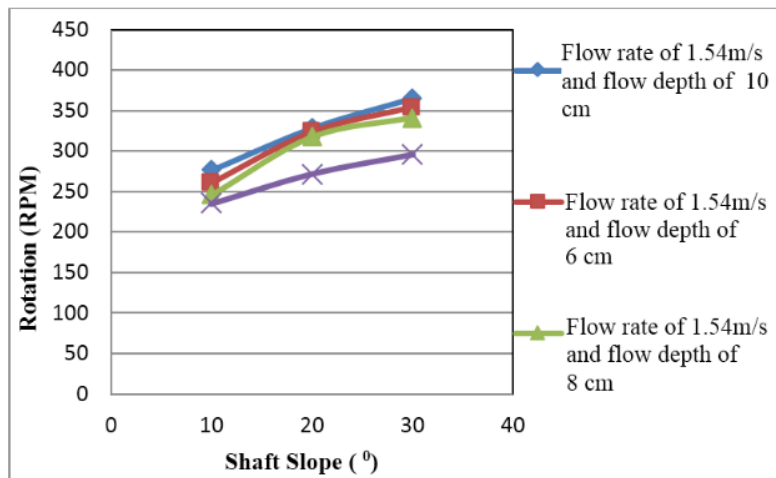

**Figure 6.** Graph between the Shaft Tilt and Rotation at a Flow Rate of 1.54 m/s

From Figure 3 to Figure 6 it shows that the graph shows the same tendency that the higher the shaft's tilt, the higher the turbine rotation. At a 30° of shaft slope, the maximum turbine rotation is 416 rpm. While at a 20° of shaft slope, the maximum turbine rotation is 350 rpm and at a 10° of shaft slope, it produces a maximum turbine rotation of 297 rpm.

### CONCLUSION

Based on the result of this research, it can be concluded that:

1. The maximum rotation produced by the turbine is at a flow rate of 1.88 with the highest rotation of 416 rpm occurs at a depth of 8 cm flow with a 30° axis inclination.
2. The result of the hydraulic power calculation is 78.4 (watt), the head factor is influenced by the slope of the shaft where the greater the slope of the shaft, the greater the hydraulic power.
3. The slope of the screw shaft is good in its performance that is at 30° slope, which produces turbine rotation of 416 rpm which occurs at a depth of 8 cm flow. While at a depth of 10 cm flow to produce turbine rotation of 402 rpm. This happens because the flow is more wasted when the flow enters the turbine.

### ACKNOWLEDGMENTS

On this occasion, the research team would like to thank the Directorate of Research and Technology and Higher Education (RISTEK DIKTI) who has provided research funding through decentralization of applied product research scheme. We also express our gratitude to the Manado State Polytechnic who has provided fund in kind in the implementation of this research.

### REFERENCES

- [1] Havendri Adly, Irvan Arnif. 2010. Prosiding SNNTM ke- 9 Palembang 13-15 Oktober 2010. Fakultas teknik Universitas Andalas, Padang.
- [2] Havendri Adly, Hendro lius. 2009. Artikel Teknik No 31 vol 2, Thn XVI, April 2009, Fakultas teknik Universitas Andalas, Padang.
- [3] Hizhar Yul (2011). Artikel, *Design and experimental study of the differences of pitches and shaft slope to mechanics performance of 2-blades screw turbine model in low head flow*. UGM Yogyakarta.
- [4] Lashofer, A., Kaltenberger, F., and Pelikan, F. (2011). "Wie gut bewahrt sich die wasserkraftschnecke in der Praxis." *Wasserwirtschaft*, 7-8, 76-82.
- [5] Munson, (2002). *Fundamentals of Fluid Mechanics*. 4<sup>th</sup>. Ed Wiley, 2002.
- [6] Müller.G (2009). *Simplified theory of Archimedean screw*, Journal of Hydraulic. Vol 47, pp. 666-669. University of Southamton, UK.
- [7] Nagel, G. (1968). *Archimedean screw pump handbook*. Prepared for Ritz-Astro Pumpwerksbau GMBH Roding, Nürnberg, Germany.
- [8] Nuembergk Dirk. M and Chris Rorres (2013). *Analytical Model for Water Inflow of an Archimedes Screw Used in Hydropower Generation*. Journal of Hydraulic Engineering, vol. 139, no. 2.
- [9] Rorres, C (2000). *The turnoff the screw: Optimal design of the Archimedean screw*. Journal of Hydraulic. 126(1), 72-80

- [10] Saroinsong Tineke, at al. (2015) *The Effect of Head Inflow and Turbine Axis Angle Towards The Three Row Bladed Screw Turbine Efficiency*. International Journal of Applied Engineering Research. Vol. 10, no 7, pp 16977-16984. RIP, India. (published and indexing by Scopus).
- [11] Saroinsong Tineke, at al (2016). *Fluid Flow Phenomenon in a Three-Bladed Power Generating Archimedes Screw Turbine*. Journal of Engineering Science and Technology Review. Vol.9, no 2, pp. 72-79. Kavala Institute of Technology, Greece (Yunani). (published and indexing by Scopus).
- [12] Saroinsong Tineke, at al (2016). *Performance of Three-Bladed Archimedes Screw Turbine*. ARPN journal of Engineering and Applied Sciences. Vol.11, No 15, pp 9491-9495. ARPN Journals, Pakistan.(published and indexing by Scopus).
- [13] Saroinsong Tineke, at al (2016). *Effect of Froude Numbers on Three-Bladed Archimedes Screw Turbine Efficiency*. International Journal of Renewable Energy Research. Vol.6, No 3 (2016), pp 1153-1158. Gazi University, Turkey. (published and indexing by Scopus).
- [14] Williamson S.J at all (2014). *Low head pico hydro turbine selection using a multi-criteria analysis*. Journal of Renewable Energi, vol 61 (2014) 43-50. Elsevier.

# Experimental Study: The Influence of Shaft Slope on Rotation of the Three Bladed Archimedes Screw Turbine

---

ORIGINALITY REPORT

---

0%

SIMILARITY INDEX

---

PRIMARY SOURCES

---

EXCLUDE QUOTES ON

EXCLUDE SOURCES

< 10 WORDS

EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES

OFF